

Telescoping Strut Replacement

Features

- Ready to use out of the box and eliminates the need for cutting sections of strut
- Captive threaded nuts enable fastening to threaded rod supports without loose parts
- Clearance holes help quickly create multi-level trapeze assemblies
- Supports up to four 2" (50 DN) conduits or four 2" (50 DN) water filled pipes at 10' (3 m) spacing
- Works with the KBT Wire Basket Tray Clip for securing wire basket cable tray
- Works with SCH Single-Piece Strut Clamps

The Telescoping Strut Replacement is an innovative alternative to using strut-based trapeze or support structures to support cable tray, conduit or pipe. It eliminates the need for handling long lengths of strut and cutting sections of strut to size. The bracket telescopes to the desired length, attaches to threaded rod with a captive threaded nut at each end, and is locked in place by tightening a screw on a pre-installed steel band.




Material: Steel

Finish: Pre-galvanized

Part Number	Rod Size RS	Hole Size HS	A	B	C	D	E	Thickness T	Static Load F
TSR20038	3/8"	1/4"	12.61" – 20"	11.36" – 18 3/4"	1.4"	0.81"	1.12"	0.04"	200 lb

Static loads are assumed to be uniformly distributed.

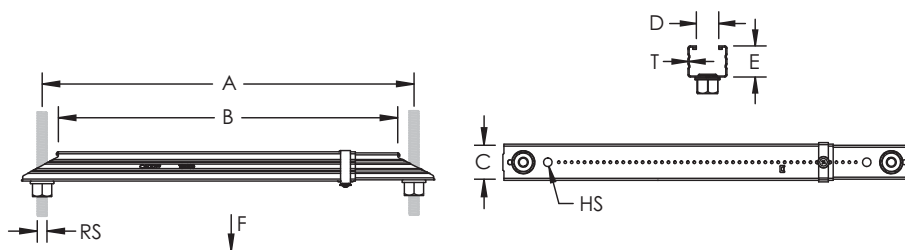

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2013 ERICO International Corporation. All rights reserved. CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.